



PLAN VIEW

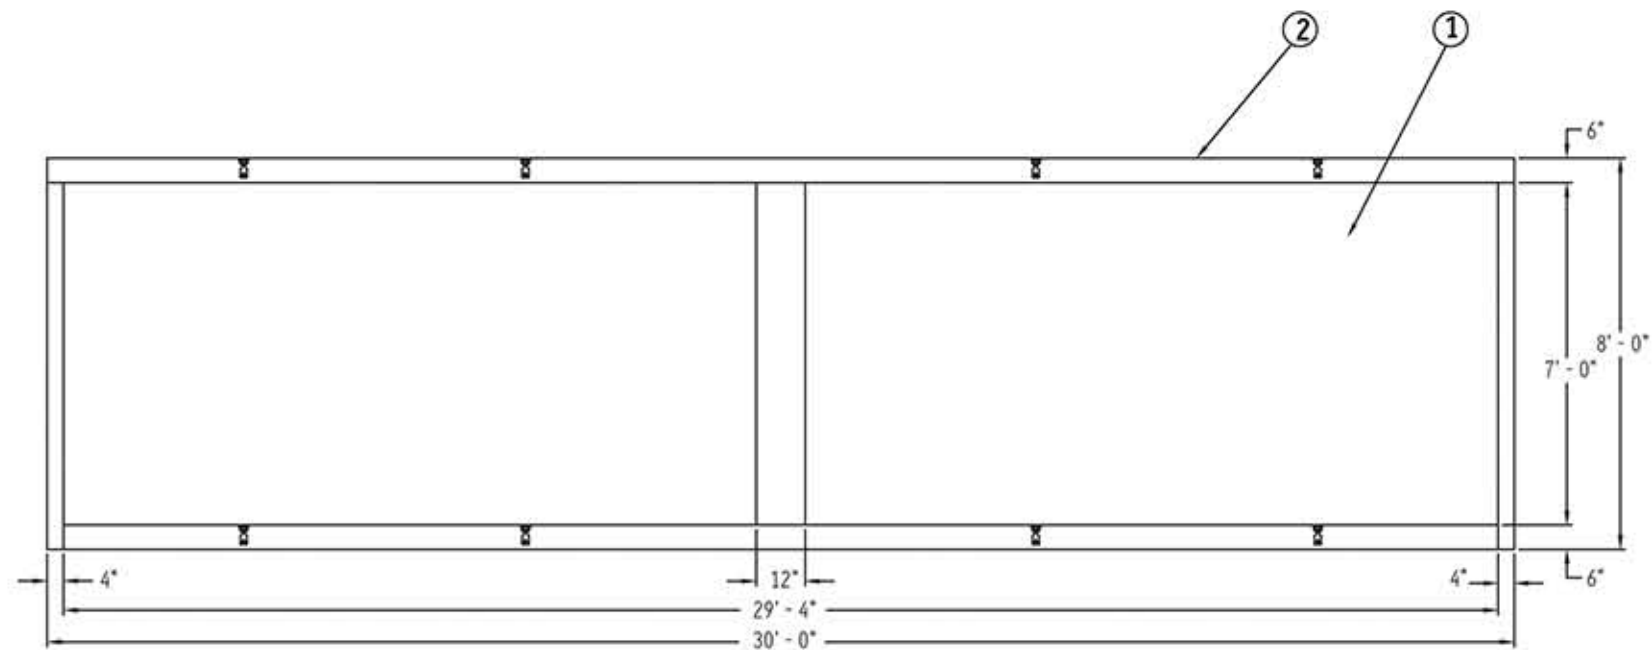

FRONT ELEVATION

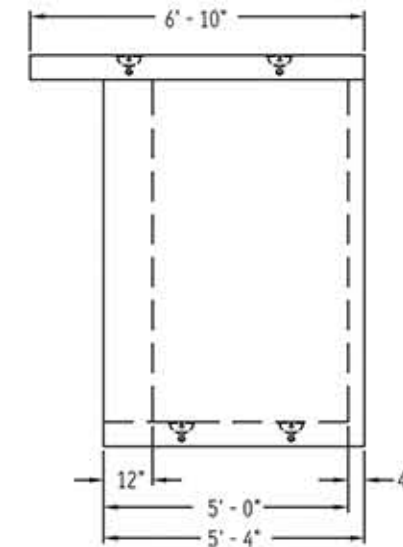

RIGHT SIDE ELEVATION

BILL OF MATERIALS

Item	Description	Quantity
1	PREFABRICATED PRECAST CONCRETE WALLS, FLOOR AND ROOF	1
2	POST TENSIONED ROOF	1
3	8T LIFTING ANCHORS	16

SPECIFICATIONS

- CONCRETE:** 5,000 psi @ 28 DAYS
5%-8% ENTRAINED AIR
- REBAR:** ASTM A-615 GRADE 60
- DESIGN CRITERIA:** WALLS COMPLY WITH CITY OF CHICAGO BUILDING CODES AND 1993 BOCA CODES FOR 80 MPH WINDS
- FINISH:** FINISH OPTIONS
 - SMOOTH CONCRETE
 - EXPOSED AGGREGATE
 - PAINTED
 FLOOR IS SKID RESISTANT
- WEIGHT:** BASE: 27,626#
 ROOF: 15,374#
 TOTAL: 43,000#

CONTACT UCP FOR SITE PREPARATION AND INSTALLATION INSTRUCTIONS

30'-0" x 6'-10" x 8'-0" PRECAST DUGOUT

Get the Precast Advantage!